



ELEVEX



The vertical platformlift for lifting heights up to 1830mm

The Elevex is a vertical platform lift designed for low-rise travel indoors or outdoors. With its durable design, the Elevex is popular for accessing decks and porches even in demanding climates and is ideal for outdoor use in public and private buildings.

At the heart of the Elevex is the reliable operation of the ACME screw drive which delivers precision movement and performance you can count on day after day. Handling up to 340kg this lift can carry a passenger in a wheelchair with ease. An array of safety features ensures safe operation including sensors to stop the lift if it senses an obstruction. The Elevex is an easy and economic way to add access for low-rise travel.



Robust design for installation in any climate

Free standing drive tower for ease of installation



LEHNER
LIFTTECHNIK

ELEVEX

Free-standing

The free-standing drive tower permits a fast and simple installation with only minimum constructual works required on site.

Quality and safety

CE approved! Fulfills highest safety standards and is built in conformity with the European machinery directive.

Reliable

Especially designed for outside installation, the screw drive and the robust electrics provide for a safe drive and a low-maintenance operation.

340kg loading capacity can take scooters and heavy wheelchairs



The EleveX vertical platform lift



Main advantages of the EleveX platformlift

- Up to 1830mm lifting height
- Smooth and stable drive
- Free standing drive tower, fixing only below the platform floor
- Drive tower to be mounted in 1 piece for a fast and simple installation
- Reliable and safe ACME screw drive
- With or without upper landing gate
- With automatic access ramp
- Entry-exit on same side or at 90°






Upper gate **integrated into balustrade**



Platform with **side exit on upper level**

Elevez - Technical Specification

| | |
|------------------------|-------------------------------|
| Loading capacity | 340 kg |
| Lifting height | 1830 mm |
| Standard platform size | 914 x 1372 mm |
| Drive system | ACME screw drive |
| Lifting speed | 0,11 m/s |
| Min. platform height | 70 mm |
| Standard colour | Light grey |
| Noise level | Under 60dB |
| Temperature range | +45°C down to -30°C |
| Drive motor | 0,75 kW |
| Power supply | 1x230V / 50-60Hz |
| Conformity | CE according to MD 2006/42/EC |

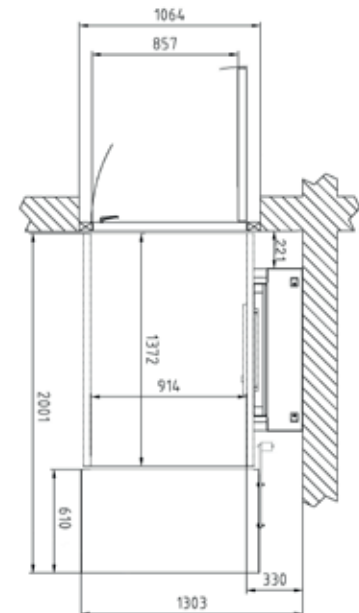

Together we provide accessibility!

For further information please contact:



Platform stairlifts



Chair stairlifts



Vertical platformlifts



Stairclimbers



Poollifts

Official
partner of:

LEHNER
LIFTTECHNIK